


Supplement

Manual Title: PLS HVR 505 Operating Manual
Part Number: 4789914 Supplement Issue: **2**
Print Date: March 2017 Issue Date: 8/17
Revision/Date: Page Count: 3

This supplement contains information necessary to ensure the accuracy of the above manual.

Change #1, 461

On the Cover, add the  **Symbol**.

Change #2, 477

Remove pages 12 and 13 and replace with:

PLS HDR 1000 DETECTOR

1. SPECIFICATIONS

Available Distance: From rotary PLS HDR 1000 (2.0 ft.)

Accuracy: Precise detecting: $\pm 1\text{mm}$ ($\pm 0.04\text{ in}$)

Rough detecting: $\pm 2\text{mm}$ ($\pm 0.08\text{ in}$)

Detecting Indication: Bi-surface LCD, buzzer

Power: DC9V alkaline battery

Automatic Power-off Time: Approx. 20 minutes


Working Temperature: -20°C to $+50^{\circ}\text{C}$ (-4°F to $+122^{\circ}\text{F}$)


Dimensions: 135 (L) X 65 (W) X 24.5 (H) mm

6 x 2-3/4 x 1 inch

Weight: 0.15kg (0.44lbs) (with battery)

2. LCD

Precise Detecting
Reference Position
Display: 


Rough Detecting
Reference Position
Display: 


Higher than
reference
(fast
frequency
beep)


In reference
line (long
beep)

Lower than
reference
(slow
frequency
beep)

Poor Power:

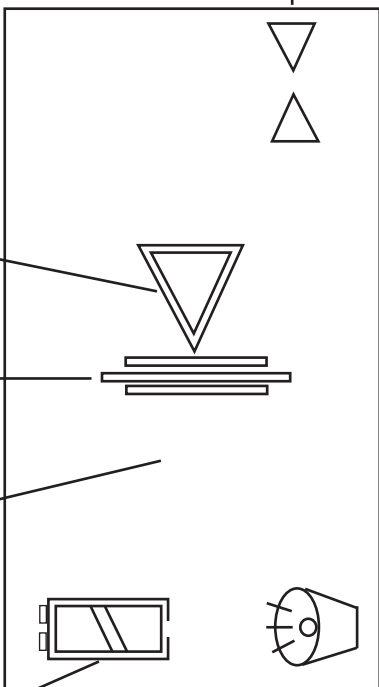

Buzzer On: 

Buzzer Off: 

3. PANEL

LCD (Both on Front Shell & Back Shell)

Buzzer ON/OFF
Once power on, default of buzzer is on

44mm
1 3/4 Inches

Mark

Laser Receptor

Detecting Mode

Buzzer

Power Switch

